
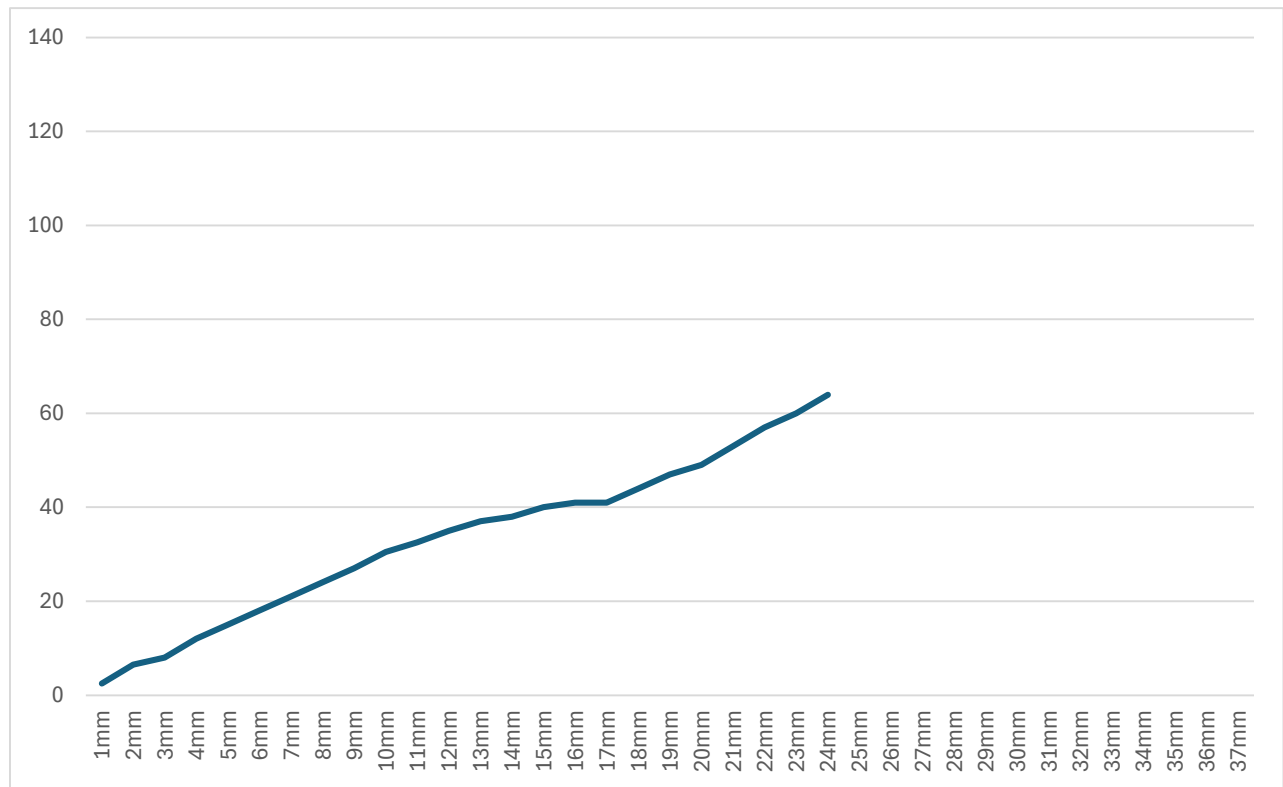


# FBR50サイズ(Φ22.0mm)

ストローク量	Soft
1mm	2.5
2mm	6.5
3mm	8
4mm	12
5mm	15
6mm	18
7mm	21
8mm	24
9mm	27
10mm	30.5
11mm	32.5
12mm	35
13mm	37
14mm	38
15mm	40
16mm	41
17mm	41
18mm	44
19mm	47
20mm	49
21mm	53
22mm	57
23mm	60
24mm	64
25mm	
26mm	
27mm	
28mm	
29mm	
30mm	
31mm	
32mm	
33mm	
34mm	
35mm	
36mm	
37mm	

(kgf)

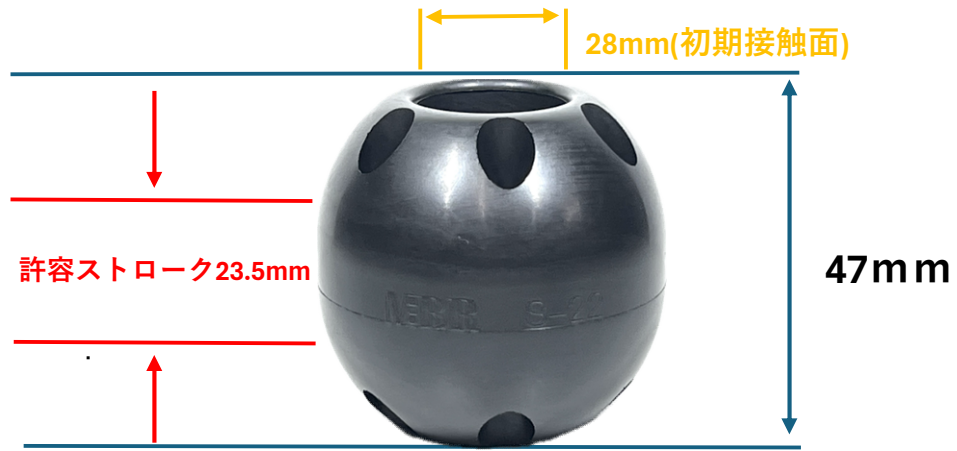

## FBR50 Φ22.0mm (Fusion)

ストローク量	②
1mm	1.5
2mm	3
3mm	4.5
4mm	6.5
5mm	8.5
6mm	10.5
7mm	12.5
8mm	14.5
9mm	16.5
10mm	18.5
11mm	20.5
12mm	22.5
13mm	24.5
14mm	26.5
15mm	28.5
16mm	30.5
17mm	32.5
18mm	35
19mm	37
20mm	38
21mm	39.5
22mm	41
23mm	42
24mm	43
25mm	44
26mm	46
27mm	49
28mm	52
29mm	55
30mm	58
31mm	61.5
32mm	66
33mm	70
34mm	75
35mm	77.5
36mm	83
37mm	

(kgf)

※MBRは、Fusion(ツイン構成)での使用を推奨しています。

②FBR50+FR45(ピストンロッド径Φ22.0mm)

