
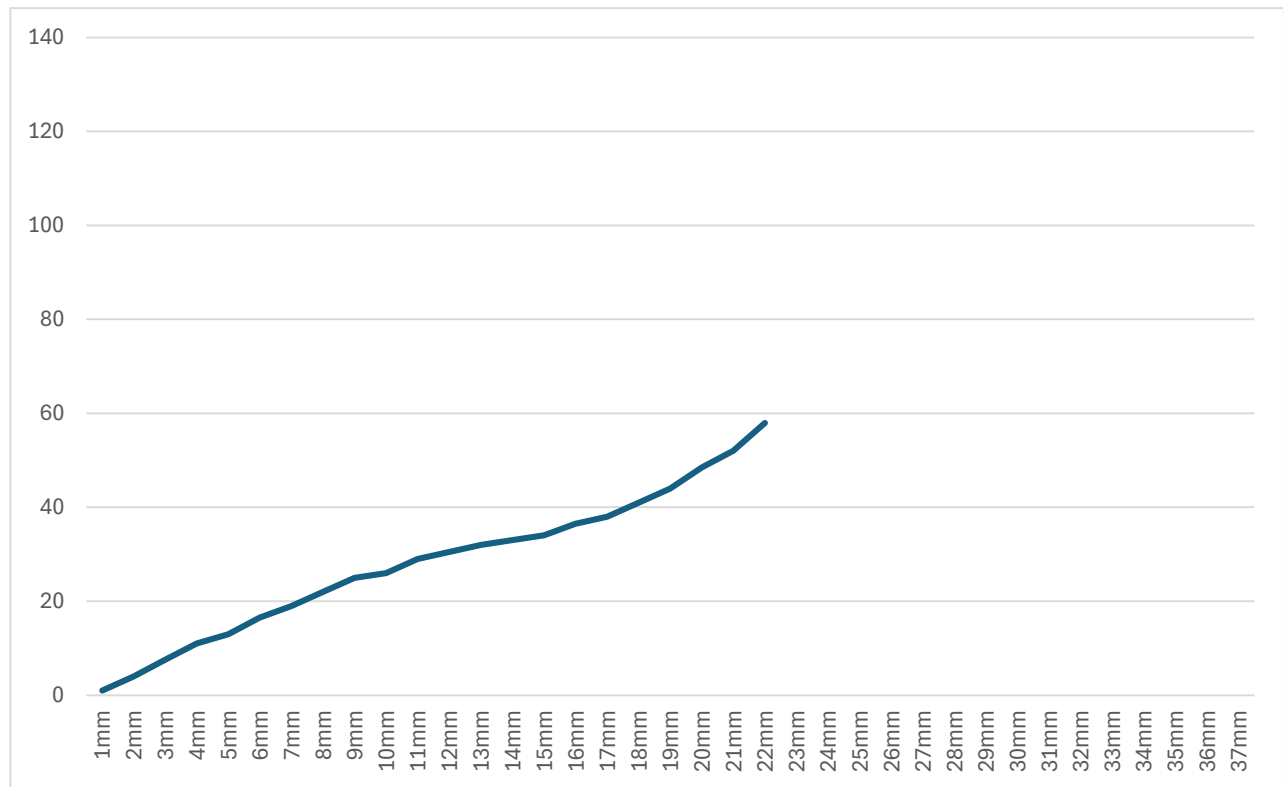


FBR48サイズ(Φ20.0mm)

ストローク量	Soft
1mm	1
2mm	4
3mm	7.5
4mm	11
5mm	13
6mm	16.5
7mm	19
8mm	22
9mm	25
10mm	26
11mm	29
12mm	30.5
13mm	32
14mm	33
15mm	34
16mm	36.5
17mm	38
18mm	41
19mm	44
20mm	48.5
21mm	52
22mm	58
23mm	
24mm	
25mm	
26mm	
27mm	
28mm	
29mm	
30mm	
31mm	
32mm	
33mm	
34mm	
35mm	
36mm	
37mm	

(kgf)

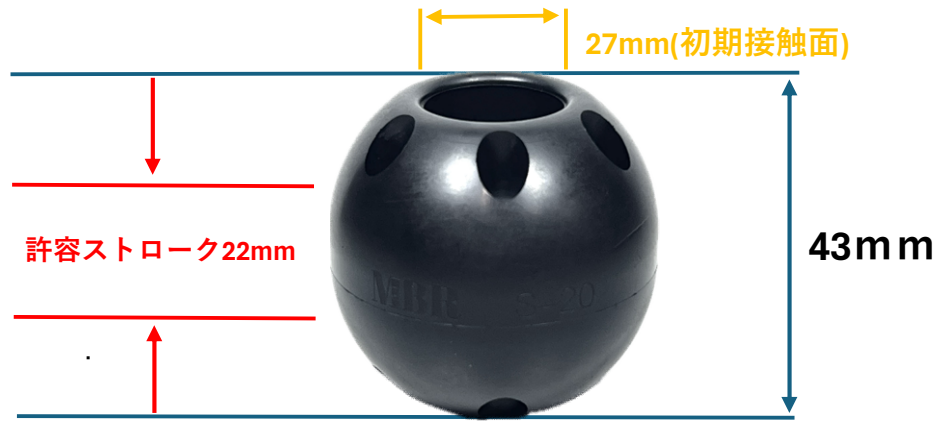

FBR48 Φ20.0mm (Fusion)

ストローク量	①
1mm	1
2mm	2.5
3mm	4
4mm	6
5mm	8.5
6mm	10
7mm	12
8mm	14
9mm	17
10mm	18.5
11mm	21
12mm	22.5
13mm	24.5
14mm	27
15mm	28
16mm	29
17mm	30.5
18mm	31
19mm	31.5
20mm	33
21mm	35.5
22mm	37.5
23mm	40
24mm	42
25mm	44
26mm	46.5
27mm	50
28mm	54.5
29mm	58
30mm	63
31mm	69
32mm	74.5
33mm	80
34mm	86.5
35mm	
36mm	
37mm	

(kgf)

※MBRは、Fusion(ツイン構成)での使用を推奨しています。

①FBR48+FR43(ピストンロッド径Φ20.0mm)

許容ストローク34mm

